



phase-out type solid-state contactor 1-phase 3RF2 AC 51 / 10.5 A / 40 °C 24-230 V / 24 V DC screw terminal

| | |
|--|--|
| product brand name | SIRIUS |
| product designation | solid-state contactor |
| design of the product | 1-pole |
| product type designation | 3RF23 |
| manufacturer's article number | |
| <ul style="list-style-type: none"> • _1 of the accessories that can be ordered • _3 of the accessories that can be ordered • _4 of the accessories that can be ordered • _5 of the accessories that can be ordered | 3RF2900-3PA88 3RF2900-0EA18 3RF2920-0GA13 3RF2920-0FA08 |
| product designation | |
| <ul style="list-style-type: none"> • _1 of the accessories that can be ordered • _3 of the accessories that can be ordered • _4 of the accessories that can be ordered • _5 of the accessories that can be ordered | terminal cover converter load monitoring load monitoring, basis |
| General technical data | |
| product function | zero-point switching |
| power loss [W] for rated value of the current | |
| <ul style="list-style-type: none"> • at AC in hot operating state • at AC in hot operating state per pole • without load current share typical | 11 W 11 W 0.4 W |
| insulation voltage rated value | 600 V |
| degree of pollution | 3 |
| surge voltage resistance of main circuit rated value | 6 kV |
| protection class IP | IP20 |
| protection class IP on the front according to IEC 60529 | IP20 |
| shock resistance according to IEC 60068-2-27 | 15 g / 11 ms |
| vibration resistance according to IEC 60068-2-6 | 2 g |
| reference code according to IEC 81346-2 | Q |
| Substance Prohibitance (day/month/year) | 05/28/2009 |
| SVHC substance name | Lead CAS-No. 7439-92-1 Lead monoxide (lead oxide) CAS-No. 1317-36-8 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one CAS-No. 71868-10-5 Melamine CAS-No. 108-78-1 Dibutylbis(pentane-2,4-dionato-O,O')tin CAS-No. 22673-19-4 |
| Net Weight | 0.12 g |
| Main circuit | |
| number of poles for main current circuit | 1 |
| number of NO contacts for main contacts | 1 |
| number of NC contacts for main contacts | 0 |

| | |
|--|--|
| type of voltage of the operating voltage | AC |
| operating voltage | |
| • at AC | |
| — at 50 Hz rated value | 24 ... 230 V |
| — at 60 Hz rated value | 24 ... 230 V |
| operating frequency rated value | 50 ... 60 Hz |
| operating range relative to the operating voltage at AC | |
| • at 50 Hz | 20 ... 253 V |
| • at 60 Hz | 20 ... 253 V |
| operational current | |
| • at AC-1 at 400 V rated value | 10.5 A |
| • at AC-51 rated value | 10.5 A |
| • at AC-51 according to IEC 60947-4-3 | 7.5 A |
| • according to UL 508 rated value | 9.6 A |
| operational current minimum | 100 mA |
| rate of voltage rise at the thyristor for main contacts maximum permissible | 500 V/ μ s |
| blocking voltage at the thyristor for main contacts maximum permissible | 800 V |
| reverse current of the thyristor | 10 mA |
| derating temperature | 40 °C |
| surge current resistance rated value | 200 A |
| I²t value maximum | 200 A ² ·s |
| Control circuit/ Control | |
| type of voltage of the control supply voltage | DC |
| control supply voltage 1 at DC rated value maximum permissible | 30 V |
| control supply voltage 1 at DC | 15 ... 24 V |
| control supply voltage at DC | |
| • initial value for signal <1> detection | 15 V |
| • full-scale value for signal<0> recognition | 5 V |
| control current at minimum control supply voltage | |
| • at DC | 13 mA |
| control current at DC rated value | 15 mA |
| ON-delay time | 1 ms; additionally max. one half-wave |
| OFF-delay time | 1 ms; additionally max. one half-wave |
| Installation/ mounting/ dimensions | |
| fastening method side-by-side mounting | Yes |
| fastening method | screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 |
| design of the thread of the screw for securing the equipment | M4 |
| height | 95 mm |
| width | 22.5 mm |
| depth | 88 mm |
| Connections/ Terminals | |
| product component removable terminal for auxiliary and control circuit | Yes |
| type of electrical connection | |
| • for main current circuit | screw-type terminals |
| • for auxiliary and control circuit | screw-type terminals |
| type of connectable conductor cross-sections | |
| • for main contacts | |
| — solid | 2x (1.5 ... 2.5 mm ²), 2x (2.5 ... 6 mm ²) |
| — finely stranded with core end processing | 2x (1 ... 2.5 mm ²), 2x (2.5 ... 6 mm ²), 1x 10 mm ² |
| • for AWG cables for main contacts | 2x (14 ... 10) |
| connectable conductor cross-section for main contacts | |
| • solid or stranded | 1.5 ... 6 mm ² |
| • finely stranded with core end processing | 1 ... 10 mm ² |
| type of connectable conductor cross-sections | |

| | |
|---|---|
| <ul style="list-style-type: none"> • for auxiliary and control contacts <ul style="list-style-type: none"> — solid — finely stranded with core end processing — finely stranded without core end processing • for AWG cables for auxiliary and control contacts | <p>1x (0.5 ... 2.5 mm²), 2x (0.5 ... 1 mm²)</p> <p>1x (0.5 ... 2.5 mm²), 2x (0.5 ... 1 mm²)</p> <p>1x (0.5 ... 2.5 mm²), 2x (0.5 ... 1 mm²)</p> <p>1x (20 ... 12)</p> |
| AWG number as coded connectable conductor cross section for main contacts | 10 ... 14 |
| tightening torque | |
| <ul style="list-style-type: none"> • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals | <p>2 ... 2.5 N·m</p> <p>0.5 ... 0.6 N·m</p> |
| tightening torque [lbf·in] | |
| <ul style="list-style-type: none"> • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals | <p>18 ... 22 lbf·in</p> <p>4.5 ... 5.3 lbf·in</p> |
| design of the thread of the connection screw | |
| <ul style="list-style-type: none"> • for main contacts • of the auxiliary and control contacts | <p>M4</p> <p>M3</p> |
| stripped length of the cable | |
| <ul style="list-style-type: none"> • for main contacts • for auxiliary and control contacts | <p>10 mm</p> <p>7 mm</p> |
| UL/CSA ratings | |
| operational current according to UL 508 rated value | 9.6 A |
| Electrical Safety | |
| touch protection on the front according to IEC 60529 | finger-safe, for vertical contact from the front |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 1 000 m |
| ambient temperature | |
| <ul style="list-style-type: none"> • during operation • during storage | <p>-25 ... +60 °C</p> <p>-55 ... +80 °C</p> |
| Electromagnetic compatibility | |
| conducted interference | |
| <ul style="list-style-type: none"> • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-6 | <p>2 kV / 5 kHz, behavior criterion 2</p> <p>2 kV, behavior criterion 2</p> <p>1 kV, behavior criterion 2</p> <p>140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1</p> |
| field-based interference according to IEC 61000-4-3 | 80 MHz ... 1 GHz 10 V/m, behavior criterion 1 |
| electrostatic discharge according to IEC 61000-4-2 | 4 kV contact discharging / 8 kV air discharging, behavior criterion 2 |
| conducted HF interference emissions according to CISPR11 | Class A for industrial environment |
| field-bound HF interference emission according to CISPR11 | Class B for the domestic, business and commercial environments |
| Short-circuit protection, design of the fuse link | |
| <p>manufacturer's article number</p> <ul style="list-style-type: none"> • of gS fuse for semiconductor protection at NH design usable • of full range R fuse link for semiconductor protection at cylindrical design usable • of back-up R fuse link for semiconductor protection at NH design usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable | <p>3NE1813-0</p> <p>5SE1316</p> <p>3NE8015-1</p> <p>3NC1020</p> <p>3NC1430</p> <p>3NC2225</p> |
| <p>manufacturer's article number of the gG fuse</p> <ul style="list-style-type: none"> • at NH design usable • at cylindrical design 10 x 38 mm usable • at cylindrical design 10 x 38 mm usable note | <p>3NA6803</p> <p>3NW6001-1: These fuses have a smaller rated current than the semiconductor relays</p> <p>These fuses have a smaller rated current than the semiconductor relays</p> |

- at cylindrical design 14 x 51 mm usable

[3NW6101-1: These fuses have a smaller rated current than the semiconductor relays](#)

- at cylindrical design 14 x 51 mm usable note

These fuses have a smaller rated current than the semiconductor relays

manufacturer's article number

- of NEOZED fuse usable

[5SE2306: These fuses have a smaller rated current than the semiconductor relays](#)

Approvals Certificates

| | |
|-------------|--------------------------|
| Environment | General Product Approval |
|-------------|--------------------------|

[Environmental Confirmations](#)



| | | | | | |
|-----|-------------------|-------|--|--|--|
| EMV | Test Certificates | other | | | |
|-----|-------------------|-------|--|--|--|



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)

[Confirmation](#)

[Miscellaneous](#)

[Confirmation](#)

| | |
|-------|---------|
| other | Railway |
|-------|---------|



[Special Test Certificate](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2310-1AA02>

Cax online generator




<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2310-1AA02>



Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RF2310-1AA02>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2310-1AA02&lang=en

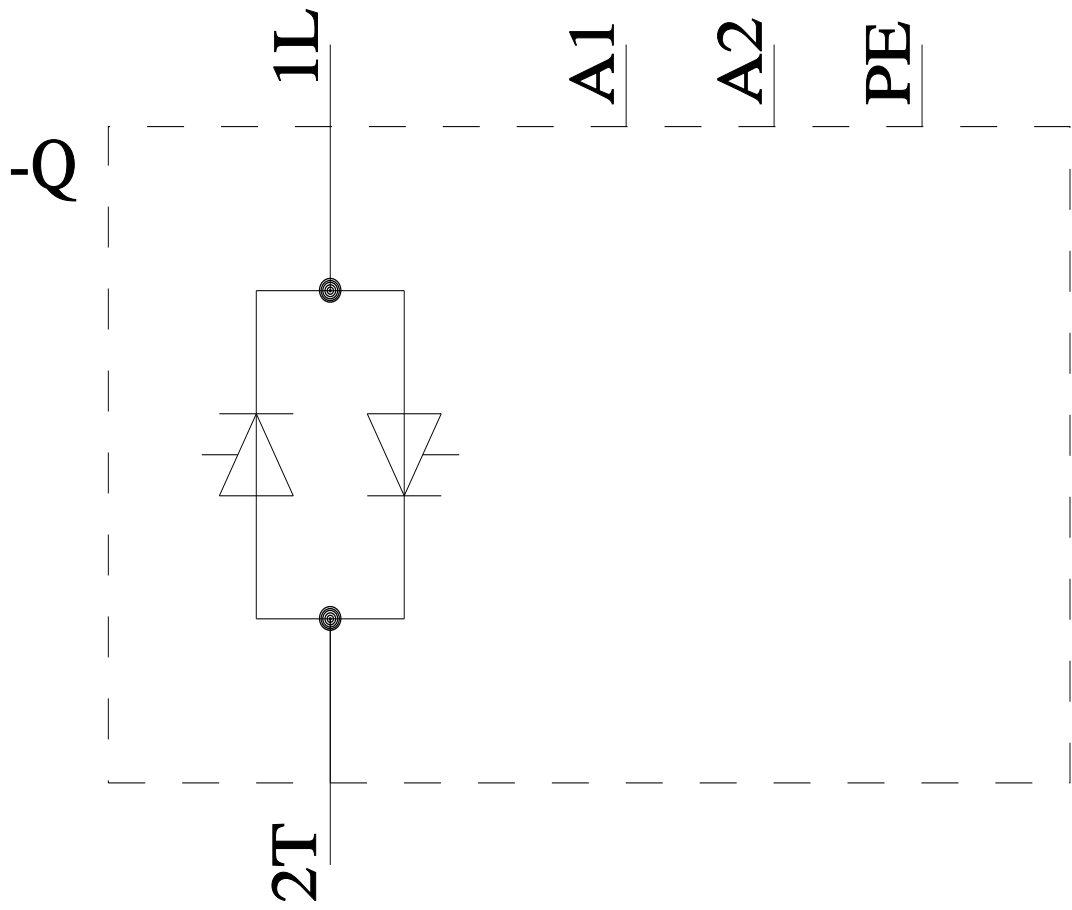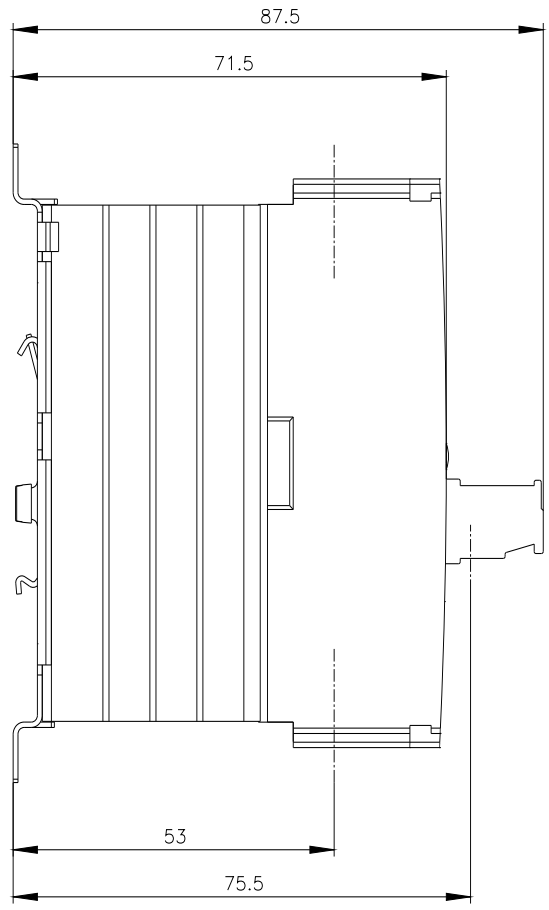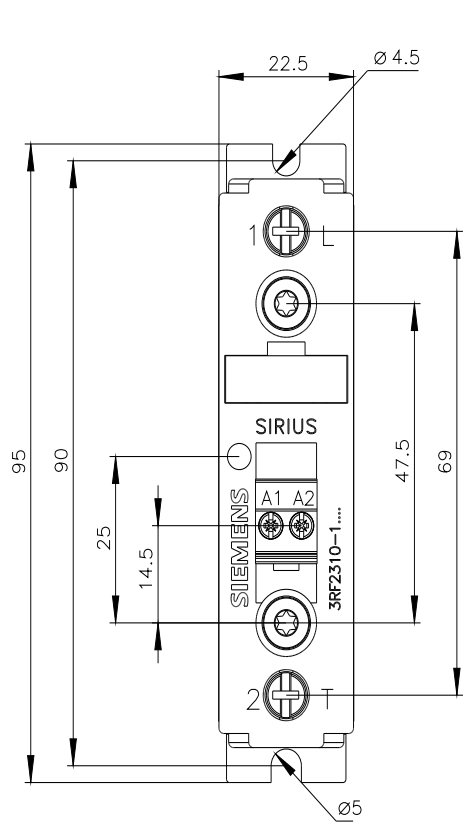

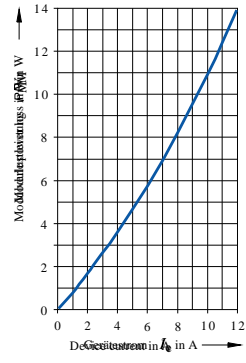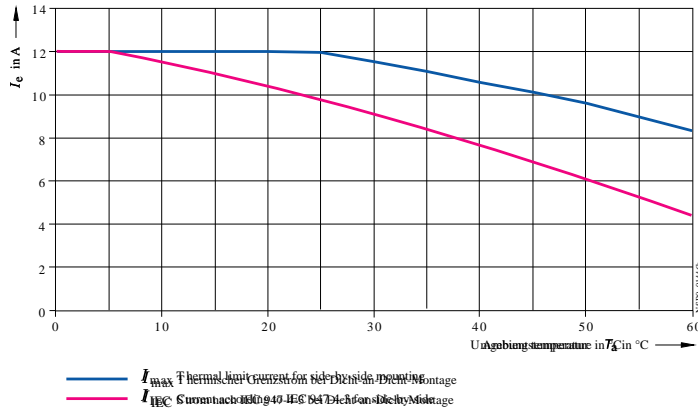

last modified:

4/4/2026